



KLASSISCHE ALTSTADTLEUCHTE MIDI MIT PRÄZISER LICHTLENKUNG.

CLASSIC HERITAGE LUMINAIRE MIDI WITH PRECISE LIGHT CONTROL.

DA: **Z** Zhaga **CE**

EN 60598-2-3



CLO

AC / DC

10kV

RA 70 CRI 70

IP 65

IK 08

220 – 240V / 50 – 60Hz

WA: 0,17m²

DB 703

Hauptanwendungen: empfohlene Masthöhe 2,50m - 4,00m
application areas: recommended pole height 2.50m - 4.00m



WA V/I MIDI

WA VII MIDI


Z-A II/3

Z-C XIV + AD XIV (Adapterplatte) (adapter plate)

AZ 35.76 + AD 76 MIDI (Adapter)

ALBRECHT /4
10,0 kg

ALBRECHT SL /4
11,6 kg

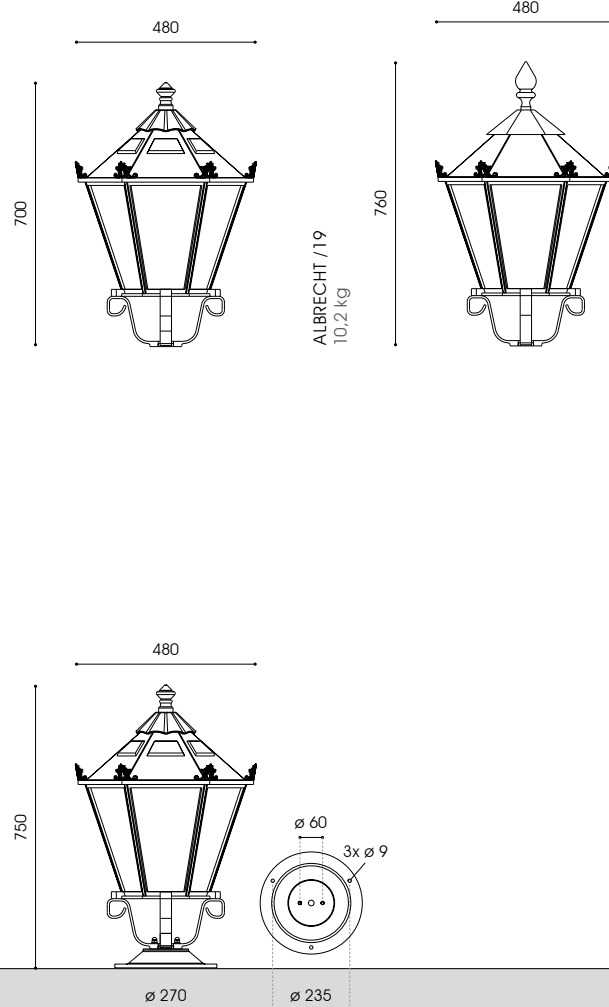



klar
clear

geperlt
pearled

satiniert
satin

ALBRECHT /4, /19



4-ARM-MIDI



ALBRECHT /4 FLS



ALBRECHT /19 DA

MIDI
MASTAUFSATZLEUCHTE | SOCKELLEUCHTE
POST TOP LUMINAIRE | PEDESTAL LUMINAIRE

FLS / DA LED

Varianten für Farbtemperatur: FLS: 2.700K / 3.000K / 4.000K
DA: 1.800K (Amber) / 2.200K / 2.700K / 3.000K / 4.000K / 5.700K
variants for colour temperature: FLS: 2.700K / 3.000K / 4.000K
DA: 1.800K (amber) / 2.200K / 2.700K / 3.000K / 4.000K / 5.700K

Varianten für Lichtverteilung:

FLS: FLS-S: oval breitstrahlend
FLS-A: asymmetrisch breitstrahlend
FLS-P: rotationssymmetrisch
DA: 028: asymmetrisch breitstrahlend
058: symmetrisch

variants for light distribution:

FLS: FLS-S: oval wide beam
FLS-A: asymmetrical wide beam
FLS-P: symmetrical
DA: 028: asymmetrical wide beam
058: symmetrical

Bereich Lichtstrom: FLS: 200lm - 3.714lm / DA: 200lm - 4.100lm
lumen range: FLS: 200lm - 3,714lm / DA: 200lm - 4,100lm

optisches System: Linsentechnologie; **DARK SKY**
optical system: lens technology; **DARK SKY**

- Leuchtenkopf inkl. Dach mit Spitze, mit Scharnier; aus Aluminiumguss; pulverbeschichtet
- Sockelleuchte (SL): mit Flanschplatte zum Aufschrauben auf bauseitigem Betonfundament
- Abdeckung aus PMMA RESIST, klar, geperlt bzw. satiniert, schlagzäh
- komplett verdrahtet, mit freien Leitungsenden
- zum Aufschrauben auf Ziermast, auf Wandausleger oder mittels Adapter AD 76 MIDI für Standardmast mit Mastkopf ø 76mm
- separat zu bestellen: Zier- bzw. Standardmast, Wandausleger, Adapter, Mastzubehör (s. S. 84 – 93), Befestigungsmaterial für Wandmontage, Lichtschott zur rückseitigen Entblendung
- luminaire head incl. canopy with top; with hinge made of cast aluminium; powder coated
- pedestal luminaire (SL): with flange plate to be screwed on a concrete foundation on site
- glazing made of PMMA RESIST, clear, pearled or satined, high-impact-resistant
- completely wired, incl. cable
- to be screwed on a heritage pole, on a wall bracket or with adapter AD 76 MIDI for standard pole with top entry ø 76mm
- to be ordered separately: heritage pole or standard pole, wall bracket, adapter, pole accessories (see pp. 84 – 93), fixing material for the wall installation, back light shield for no glare on the rear side

ALBRECHT /4 FLS

klar clear

FLS-S LED 22W/2.960lm/3.000K	5.706.9071.05LK4
FLS-A LED 22W/2.960lm/3.000K	5.706.9073.05LK4
FLS-P LED 22W/2.960lm/3.000K	5.706.9075.05LK4
FLS-x LED 11W/1.660lm/3.000K	5.706.93xx.05LK4
FLS-x LED 16W/2.220lm/3.000K	5.706.92xx.05LK4

FLS-S LED 22W/3.270lm/4.000K	5.706.9072.05LK4
FLS-A LED 22W/3.270lm/4.000K	5.706.9074.05LK4
FLS-P LED 22W/3.270lm/4.000K	5.706.9076.05LK4
FLS-x LED 11W/1.830lm/4.000K	5.706.93xx.05LK4
FLS-x LED 16W/2.470lm/4.000K	5.706.92xx.05LK4

geperlt pearled	5.706.xxxx.06LK4
satiniert satined	5.706.xxxx.056LK4
2.700K	5.706.9x8x.xxLK4

ALBRECHT /19 FLS	5.706.xxxx.xxLK19
ALBRECHT SL /x FLS	5.706.xxxx.xxSLx

Zier- / Standardmast / Adapter	heritage / standard pole / adapter
Z-A II/3	9.955.2133.70
Z-C XIV +	9.955.2214.70AFQ
AD XIV	0.910.0103.85
AZ 35.76 +	9.917.3576.70
AD 76 MIDI	9.950.0999.13

ALBRECHT /4 DA

klar clear

DA+ 2x4/028 LED 13W/2.200lm/3.000K ⁽²⁾	5.706.8207.05028-3LK4
DA+ 2x4/028 LED 15W/2.500lm/3.000K ⁽²⁾	5.706.8210.05028-3LK4
DA+ 2x4/028 LED 19W/3.200lm/3.000K ⁽²⁾	5.706.8212.05028-3LK4
DA+ 2x4/028 LED 25W/4.000lm/3.000K ⁽²⁾	5.706.8227.05028-3LK4

DA+ 2x4/028 LED 13W/2.300lm/4.000K ⁽²⁾	5.706.8207.05028LK4
DA+ 2x4/028 LED 14W/2.600lm/4.000K ⁽²⁾	5.706.8210.05028LK4
DA+ 2x4/028 LED 18W/3.300lm/4.000K ⁽²⁾	5.706.8212.05028LK4
DA+ 2x4/028 LED 23W/4.100lm/4.000K ⁽²⁾	5.706.8227.05028LK4

geperlt pearled	5.706.xxxx.06xxx(-3)LK4
satiniert satined	5.706.xxxx.056xxx(-3)LK4

ALBRECHT /19 DA	5.706.xxxx.xxxx(-3)LK19
ALBRECHT SL /x DA	5.706.xxxx.xxxx(-3)SLx

⁽²⁾ 2 Module 2 modules

Wandausleger wall bracket

WA V/1 MIDI	9.800.1000.61
WA VII MIDI	9.800.1000.79

NOT

