


luminaire head

ALFONS I DAWU LED 2.0 MLC


MULTICOLOUR



asymmetrical wide beam
height: 6.00m; area: 30m x 30m

- recom. pole height: 4.00m – 7.00m
- light standards: low and medium lighting requirements
- lamp: incl. 1 or 2 DAWU LED module(s), easy to replace
- colour temperature: 3.000K warm white and 4.000K neutral white
- LED gear: incl. electronic drivers (not dimmable, without CLO); the power can be switched on the driver via DIP-switch provided by the customer (4 levels)
- LED life expectancy: up to 100.000 hours, 55.000 hours/ L80/ B10 for minimum maintenance costs due to an excellent thermal management
- optical system: directed light (multi layer) provided by an exchangeable, anti-aging lens technology
- light distribution: asymmetrical wide beam (.028) or asymmetrical deep wide beam (.138) or narrow and wide beam (.268)
- luminaire head: die cast aluminium, powder coated
- colour: DB 703; other colours on request
- glazing: flat, clear toughened glass glazing
- wiring: completely wired; via a plug and socket connector within the luminaire head; luminaire head to be hinged upward
- installation: for top or side entry; ASA 60 or ASA 76 to be ordered separately:
 - ASA 60 for side entry \varnothing 48mm up to 60mm (0°, -5°, -10°, -15°) or for top entry \varnothing 60mm (0°, 5°, 10°, 15°)
 - ASA 76 for top entry \varnothing 76mm (0°, 5°, 10°)
- accessory: adapter ASA, column, pole accessories, wall bracket, cable, backlight shield – to be ordered separately
- application areas: parks, boulevards, schools, home for elderly people, hotels, factory premises, residential and local distribution roads, main streets, car parks, pedestrian and cycle lanes, holiday parks

lamp	kg	produkt code
4 adjustable power levels 3.000K:		
23W/3.700lm/500 mA	27W/4.350lm/600mA*	
30W/4.650lm/650 mA	32W/4.950lm/700 mA	
4 adjustable power levels 4.000K:		
23W/4.000lm/500 mA	27W/4.700lm/600 mA*	
30W/5.000lm/650 mA	32W/5.350lm/700 mA	
adjustable power level:		
LED 028 DAWU 27W/4.350lm/3.000K ⁽²⁾		
LED 028 DAWU 27W/4.700lm/4.000K ⁽²⁾	7,4	9.136.7248.028-34
necessary accessory: cast aluminum, DB 703		
ASA 60	0,9	9.924.0980.70
ASA 76	1,0	9.924.0979.70
accessory: back light shield for DA lenses		
LS DA 1		2.914.8301.17

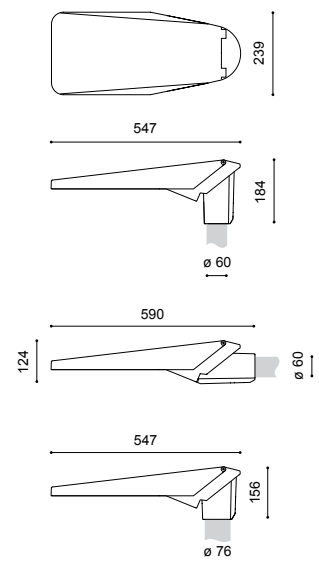

(2) 2 modules
class II at extra cost (add "S" at the end)

Technical specifications are subject to change without notice. 12.2024

