



Zhaga CE

EN 60598-2-3



RA 70 CRI 70

IP 66

IK 10




220 - 240V / 50 - 60Hz

WA: 0,03m²

DB 703

LICHTSTROM IN 4 STUFEN EINSTELLBAR. LUMINOUS FLUX IN 4 STEPS ADJUSTABLE.

Hauptanwendungen: empfohlene Masthöhe 3,00m - 7,00m
 application areas: recommended pole height 3.00m - 7.00m

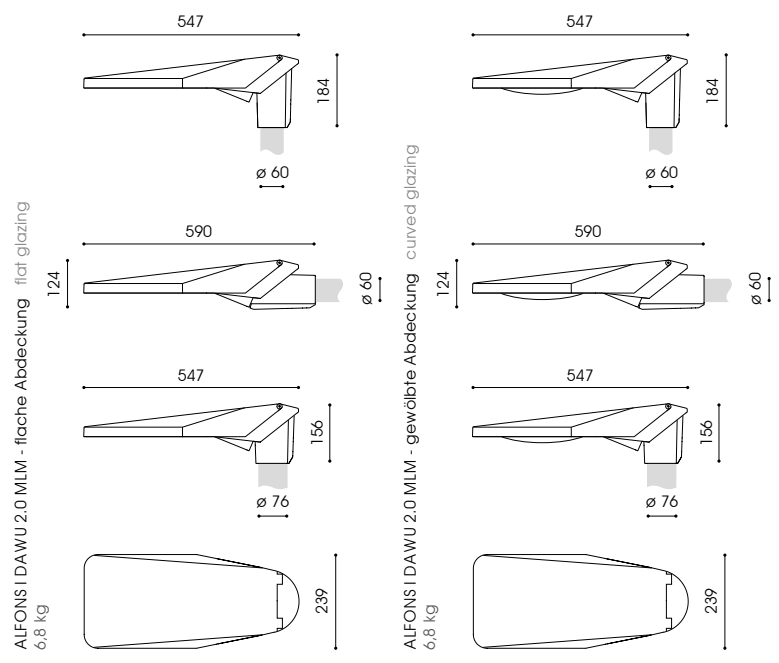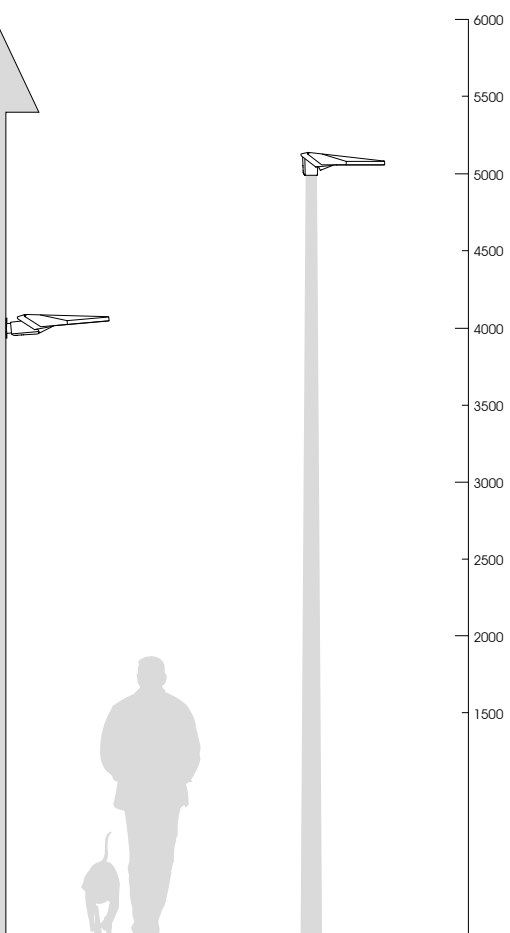

notwendiges Zubehör:
 necessary accessory:



ALFONS I MLM



mit ASA 76, flache Abdeckung
with ASA 76, flat glazing



mit ASA 60, gewölbte Abdeckung
with ASA 60, curved glazing

MASTAUF- / MASTANSATZLEUCHE
POST TOP - / SIDE ENTRY LUMINAIRE

DAWU LED 2.0

Varianten für Farbtemperatur: 1.800K (Amber) / 2.200K / 2.700K / 3.000K / 4.000K / 5.700K
variants for colour temperature: 1,800K (amber) / 2,200K / 2,700K / 3,000K / 4,000K / 5,700K

Varianten für Lichtverteilung:

028: asymmetrisch breitstrahlend
058: symmetrisch
138: asymmetrisch tiefbreitstrahlend
268: eng- und breitstrahlend
078: rechtsstrahlend
variants for light distribution:
028: asymmetrical wide beam
058: symmetrical
138: asymmetrical deep wide beam
268: narrow and wide beam
078: right beam

Bereich Lichtstrom: Multilumen 1.900lm - 9.800lm
lumen range: multilumen 1,900lm - 9,800lm

optisches System: Linsentechnologie; **DARK SKY**
optical system: lens technology; **DARK SKY**

- Leuchtenkopf aus Aluminiumdruckguss, pulverbeschichtet
- Abdeckung aus Einscheiben-Sicherheitsglas, klar, flach bzw. gewölbt
- komplett verdrahtet; mit Hilfe einer Steckkupplung im Inneren des Leuchtenkopfes; Leuchtenkopf zum Aufklappen
- mittels Auf- bzw. Ansatzstück ASA für Mastaufsatz ø 76mm bzw. ø 60mm (Neigung 0°, 5°, 10°) oder für Mastansatz ø 48mm bis ø 60mm
- separat zu bestellen: Auf- bzw. Ansatzstück ASA (notwendig), Mast, Mastzubehör, Wandausleger, Kabel, Lichtschott zur rückseitigen Entblendung

- luminaire head made of die cast aluminium, powder coated
- glazing made of toughened glass glazing, clear, flat or curved
- completely wired; via a plug and socket connector within the luminaire head; luminaire head to be hinged upward
- with adapters ASA for top entry ø 76mm or ø 60mm, inclination 0°, 5° resp. 10° or for side entry ø 48mm - ø 60mm
- to be ordered separately: adapter ASA, pole, pole accessories, wall bracket, cable, back light shield for non-glare on the rear side

ALFONS I DAWU 2.0 MLM - 4.000K

flach flat

4 einstellbare Leistungsstufen: 4 adjustable power levels:

11W/2.000lm/250mA	16W/2.700lm/350mA*	
20W/3.400lm/450mA	23W/3.750lm/500mA	
* DAWU 2x8/028 LED 16W/2.700lm/4.000K		9.136.7128.028
22W/4.000lm/250mA	32W/5.400lm/350mA*	
40W/6.800lm/450mA	46W/7.500lm/500mA	
* DAWU 2x8/028 LED 32W/5.400lm/4.000K⁽²⁾		9.136.7228.028
23W/3.750lm/500mA	27W/4.350lm/600mA*	
30W/4.600lm/650mA	32W/4.900lm/700mA	
* DAWU 2x8/028 LED 27W/4.350lm/4.000K		9.136.7148.028
46W/7.500lm/500mA	54W/8.700lm/600mA*	
60W/9.200lm/650mA	64W/9.800lm/700mA	
* DAWU 2x8/028 LED 54W/8.700lm/4.000K⁽²⁾		9.136.7248.028

gewölbt curved 9.136.xxxx.1xxx

notwendiges Zubehör - separat zu bestellen
necessary accessory - to be ordered separately

Ansatz- und Aufsatzstück adapter for top and side entry	
ASA 60	9.924.0980.70
Aufsatzstück adapter for top entry	
ASA 76	9.924.0979.70

ALFONS I DAWU 2.0 MLM - 3.000K

flach flat

4 einstellbare Leistungsstufen: 4 adjustable power levels:

11W/1.900lm/250mA	16W/2.500lm/350mA	
20W/3.200lm/450mA*	23W/3.500lm/500mA	
* DAWU 2x8/028 LED 20W/3.200lm/3.000K		9.136.7128.028-3
22W/3.800lm/250mA	32W/5.000lm/350mA	
40W/6.400lm/450mA*	46W/7.000lm/500mA	
* DAWU 2x8/028 LED 40W/6.400lm/3.000K⁽²⁾		9.136.7228.028-3
23W/3.500lm/500mA	27W/4.100lm/600mA*	
30W/4.350lm/650mA	32W/4.650lm/700mA	
* DAWU 2x8/028 LED 27W/4.100lm/3.000K		9.136.7148.028-3
46W/7.000lm/500mA	54W/8.200lm/600mA*	
60W/8.700lm/650mA	64W/9.300lm/700mA	
* DAWU 2x8/028 LED 54W/8.200lm/3.000K⁽²⁾		9.136.7248.028-3

gewölbt curved 9.136.xxxx.1xxx-3

* Werkseinstellung * factory setting
⁽²⁾ 2 Module 2 modules

