


post top luminaire
ALFRED /1 DA LED

CE | Ⓢ | Ⓜ | EN 60598-2-3 | IP 65 | 220V – 240V / 50Hz – 60Hz




recom. pole height: 3.00m – 5.00m
 light standards: low and medium lighting requirements
 lamp: incl. 2 DA 2x4 LED modules
 colour temperature: 3.000K warm white or 4.000K neutral white
 surge protection: 8 kV
 LED gear: incl. electronic driver, up to 100,000 hours; with integrated Constant Light Output (CLO) in order to keep the luminous flux at the same level over the entire life time; AC/DC compatible for operation with central battery systems
 LED life expectancy: 80.000 hours/L100/B10 for minimum maintenance costs due to an excellent thermal management
 optical system: directed light (multi layer) provided by an exchangeable, anti-aging lens technology
 light distribution: asymmetrical wide beam or symmetrical
 luminaire head: incl. canopy with hinge, spike made of corrosion-resistant cast aluminium, luminaire body and canopy made of stainless steel, powder coated
 colour: RAL or DB
 glazing: PMMA RESIST, clear, satined or clear frosted; high-impact resistant
 wiring: completely wired; incl. cable
 installation: for top entry \varnothing 76mm; delivered in one piece
 accessory: column, cable junction box, pole accessories, backlight shield – to be ordered separately
 application areas: parkways, boulevards, schools, hotels, factory premises, residential and local distributor roads, paths

lamp	kg	product code
symmetrical light distribution, clear glazing		
DA 028 LED 14W/2.300lm/4.000K	20,2	5.705.8207.05028LK1
DA 028 LED 16W/2.600lm/4.000K	20,2	5.705.8210.05028LK1
DA 028 LED 21W/3.300lm/4.000K	20,2	5.705.8212.05028LK1
DA 028 LED 28W/4.100lm/4.000K	20,2	5.705.8227.05028LK1
DA 028 LED 15W/2.200lm/3.000K	20,2	5.705.8207.05028-3LK1
DA 028 LED 17W/2.500lm/3.000K	20,2	5.705.8210.05028-3LK1
DA 028 LED 23W/3.200lm/3.000K	20,2	5.705.8212.05028-3LK1
DA 028 LED 30W/4.000lm/3.000K	20,2	5.705.8227.05028-3LK1
symmetrical light distribution		5.705.xxxx.0x058(-3)LK1
pearl structured glazing		5.705.xxxx.06xxx(-3)LK1
satined glazing		5.705.xxxx.056xxx(-3)LK1
power reduction without pilot-line, dimming level and time according to customer's request		5.705.xxxx.0xxxx(-3)LK1-93
power reduction with pilot-line, dimming level and logic according to customer's request		5.705.xxxx.0xxxx(-3)LK1-94
accessory:		
backlight shield for DA-lenses plate		2.914.8301.17



480 x 480

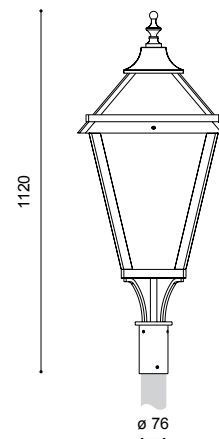

backlight shield



class II – at extra cost (add "S" at the end)

Technical specifications are subject to change without notice. 07.2019