


post top luminaire




ALFRED /1 LLM-DA LED




- recom. pole height: 3.00m – 5.00m
- light standards: low and medium lighting requirements
- lamp: incl. 1 glare-free LLM LED module, easy to replace
- colour temperature: 3.000K warm white or 4.000K neutral white
- surge protection: 10kV
- LED gear: incl. driver, up to 100,000 hours; driver with integrated Constant Light Output (CLO) in order to keep the luminous flux at the same level over the entire life time; AC/DC compatible for emergency
- LED life expectancy: 65,000 hours/ L100/ B10; 100,000 hours/ L90/ B10 for minimum maintenance costs due to an excellent thermal management
- light control: at extra cost: power reduction, dimming, DALI or CLEVER LIGHT
- optical system: reflector system for directed, horizontally mounted LLM LED module
- light distribution: extreme wide beam
- luminaire head: incl. canopy with hinge; made of stainless steel and decorative top made of cast aluminium; powder coated
- colour: DB 703; o ther RAL or DB colour without extra cost on request
- glazing: PMMA RESIST, clear, pearl structured or satined, high-impact resistant
- wiring: completely wired; incl. cable until access door (please specify pole height when ordering)
- installation: for top entry ø 76mm
- accessory: pole, pole accessories, wall bracket – to be ordered separately
- application areas: historic center, pedestrian zones, parkways, boulevards, schools, hotels, factory premises, residential and local distributor roads, squares, car parks

lamp	kg	product code
clear glazing		
LLM-DA LED 9W/1,100lm/3,000K	20.2	5.705.9017.05-2LK1
LLM-DA LED 16W/1,800lm/3,000K	20.2	5.705.9008.05-2LK1
LLM-DA LED 26W/3,000lm/3,000K	20.2	5.705.9042.05-2LK1
LLM-DA LED 8W/1,100lm/3,000K	20.2	5.705.9015.05-2LK1
LLM-DA LED 15W/1,800lm/3,000K	20.2	5.705.9005.05-2LK1
LLM-DA LED 22W/3,000lm/3,000K	20.2	5.705.9035.05-2LK1
pearl structured glazing		5.705.xxxx.06-2LK1
satined glazing		5.705.xxxx.056-2LK1
power reduction without pilot-line, dimming level and time according to customer's request		5.705.xxxx.0x-2-93LK1
power reduction with pilot-line, dimming level and logic according to customer's request		5.705.xxxx.0x-2-94LK1



480 x 480

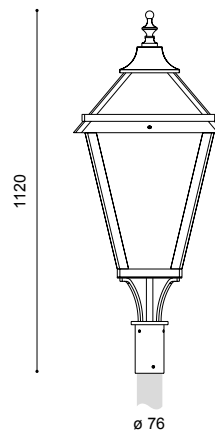

1120

ø 76

class II at extra cost (add "S" at the end)

Technische Änderungen und Irrtümer vorbehalten. 09.2022