



CE

EN 60598-2-3



CLO

AC / DC

10kV

RA 70 CRI 70

IP 65

IK 08

220 – 240V / 50 – 60Hz



3,50m WA: 0,53m²
4,00m WA: 0,56m²

WA: 0,2m²

DB 703

DIE KLEINE KLASSISCHE, KELCHFÖRMIGE LEUCHE. THE SMALL CLASSIC, CHALICE-LIKE SHAPED LUMINAIRE.

Hauptanwendungen: ML CLARA VIII/R U: empfohlene Masthöhe 3,00m und 4,00m / CLARA VIII/R U: empfohlene Masthöhe 3,50m - 4,50m
application areas: ML CLARA VIII/R U: recommended pole height 3.00m and 4.00m / CLARA VIII/R U: recommended pole height 3.50m - 4.50m

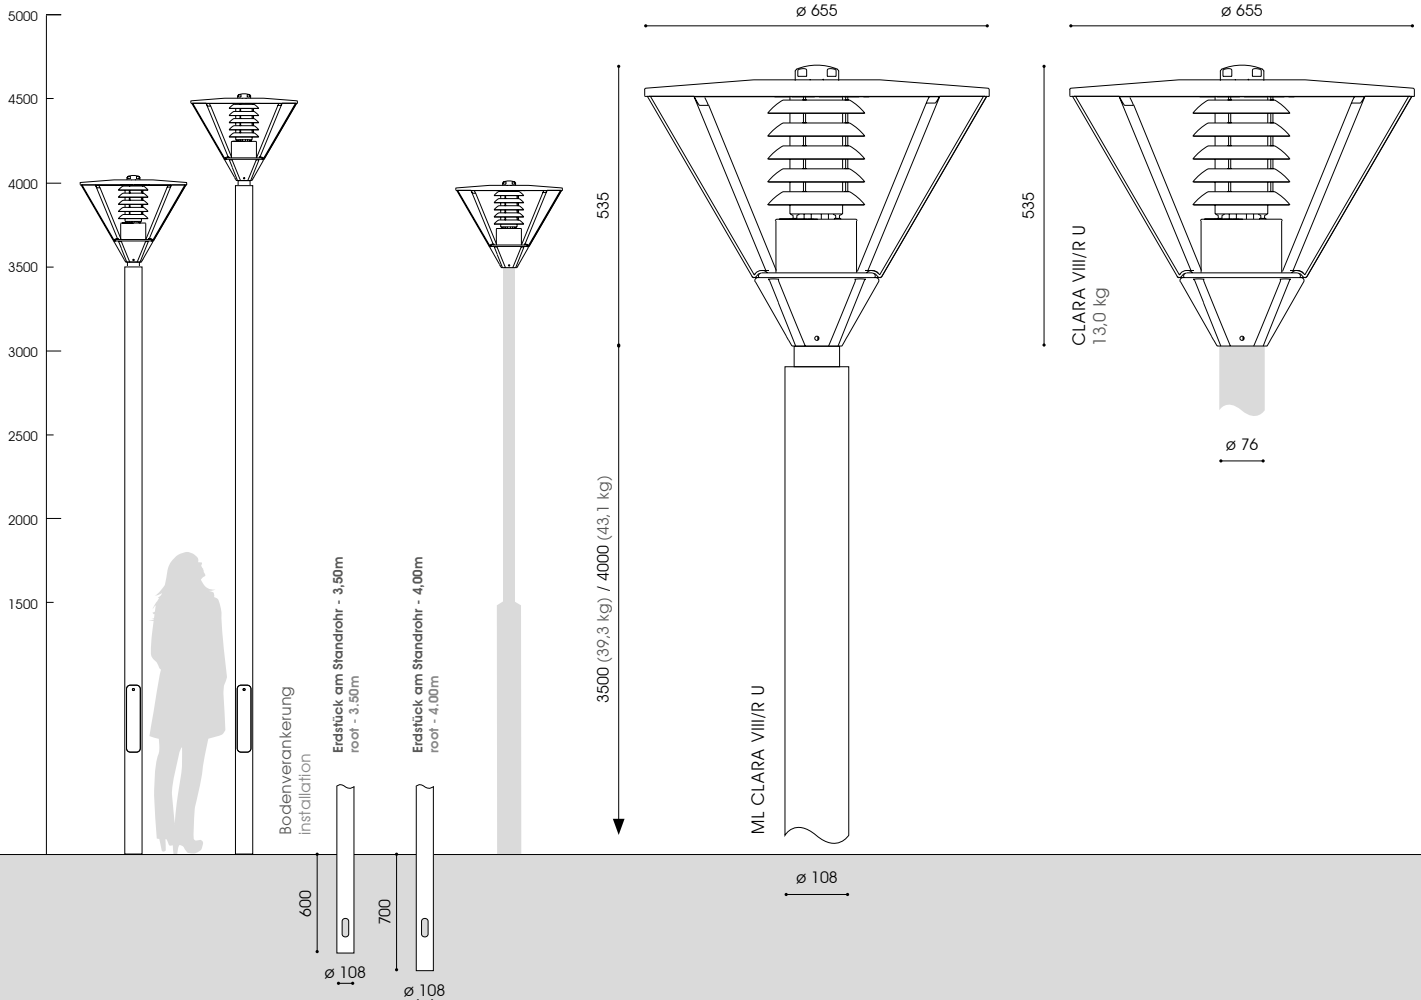

CLARA VIII



ML CLARA VIII/R U
inkl. Mast incl. pole

ML CLARA VIII/R U

CLARA VIII/R U

MASTLEUCHE | MASTAUFsatzLEUCHE
POST LUMINAIRE | POST TOP LUMINAIRE

U LED

Varianten für Farbtemperatur: 2.700K / 3.000K / 4.000K
variants for colour temperature: 2,700K / 3,000K / 4,000K

Varianten für Lichtverteilung: symmetrisch, asymmetrisch
variants for light distribution: symmetrical, asymmetrical

Bereich Lichtstrom: 2.000lm - 4.000lm
lumen range: 2,000lm - 4,000lm

optisches System: vertikales R U LED Modul; klare Abdeckung mit Lamellenreflektor und innenliegendem satinierten Blendeschutz

optical system: vertically mounted R U LED module; clear glazing with louvre system and with inner laying satined anti-glare tube

- Leuchtenkopf mit Dach aus Aluminium, mit weißer Spezialbeschichtung an der Unterseite; Geräteträger aus korrosionsbeständigem Aluminiumguss; pulverbeschichtet
- Mastleuchte: inkl. durchgängigem, zylindrischem Sondermast 3,50m bzw. 4,00m, aus feuerverzinktem Stahl mit Masttür für Kabelübergangskasten; pulverbeschichtet
- Abdeckung aus PMMA RESIST, klar, schlagzäh
- komplett verdrahtet; mit Hilfe einer Steckkupplung unterhalb des Leuchtenkopfes
- Mastleuchte: mit Erdstück am Mast zum Einsetzen in das Erdreich; Leuchtenkopf: für Mastzopf \varnothing 76mm
- separat zu bestellen: Mast (außer Mastleuchte), Kabel, Mastzubehör

- luminaire head with canopy made of aluminium with a special white, reflective underside finish; base made of corrosion-resistant cast aluminium; powder coated
- post luminaire: incl. special straight tubular pole 3.50m or 4.00m, made of hot dip galvanised steel with access door for cable junction box; powder coated
- glazing made of PMMA RESIST, clear, high-impact resistant
- completely wired; via a plug and socket connector below the luminaire head
- post luminaire: with root to be set into the ground; luminaire head: for post top \varnothing 76mm
- to be ordered separately: pole (except post luminaire), cable, pole accessories

ML CLARA VIII/R U - MASTLEUCHE POST LUMINAIRE

inkl. Mast 3,50m incl. pole 3.50m

symmetrisch symmetrical

U LED 15W/3.000lm/3.000K

U LED 17W/3.000lm/4.000K

9.764.9033.058-24A

9.764.9433.058-24A

asymmetrisch asymmetrical

hausseitige Abschirmung back shield

4,00m Höhe 4.00m height

9.764.xxxx.058-44A

9.764.xxxx.058-34A

9.764.xxxx.058-x4B

CLARA VIII/R U - MASTAUFsatzLEUCHE POST TOP LUMINAIRE

ohne Mast \varnothing 76 mm without pole \varnothing 76mm

symmetrisch symmetrical

U LED 11W/2.000lm/3.000K

U LED 15W/3.000lm/3.000K

U LED 21W/4.000lm/3.000K

9.764.9024.058-24

9.764.9033.058-24

9.764.9044.058-241

U LED 12W/2.000lm/4.000K

U LED 17W/3.000lm/4.000K

U LED 19W/4.000lm/4.000K

9.764.9022.058-24

9.764.9433.058-24

9.764.9045.058-241

asymmetrisch asymmetrical

hausseitige Abschirmung back shield

9.764.xxxx.058-4xx

9.764.xxxx.058-3xx

DA
LED

CLEVER
LIGHT

RAL
DB

DIM

□