


# the tree – luminous column

## CONRAD L | PL-LF LED

CE | Ⓢ | Ⓜ | EN 60598-2-3 | IP 65 | 220V – 240V / 50Hz – 60Hz

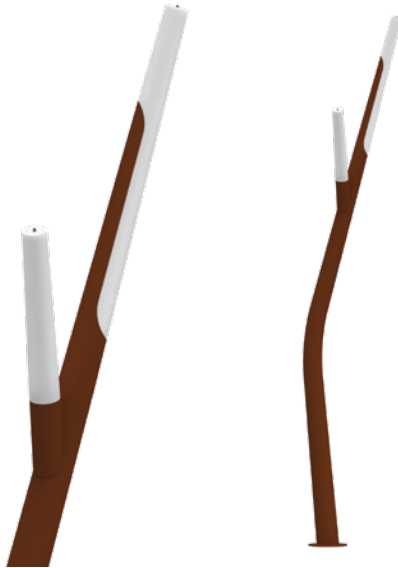

- windage area: 0.54m<sup>2</sup>
- total height: 3.88m
- light standards: low lighting requirements
- lamp: incl. PL-LF LED modules
- colour temperature: 4.000K neutral white; 3.000K warm white on request
- LED gear: incl. electronic driver up to 50,000 hours L70 / B10
- LED life expectancy: up to 60.000 hours L90/B10
- light control: at extra cost: dimming
- optical system: diffuse
- light distribution: symmetrical
- luminaire body: tapered column, with 1 access door for cable junction box, made of hot-dip galvanised steel, powder coated; incl. 2 tapered luminous areas in the shape of a branch; powder coated
- colour: powder coated in special colour "rust 01"
- glazing: PMMA RESIST, satined, high-impact resistant
- wiring: completely wired; incl. cable until access door
- installation: with flange plate to be screwed on a concrete foundation on site or on an additional bolt-on root cable junction box and bolt-on root with screws – to be ordered separately
- accessory:
- application areas: fancy and close to nature luminaire for kindergardens, parkways, boulevards, schools, hotels, home for elderly people, factory premises, special squares

lamp	kg	product code
PL-LF LED 27W/3,520lm/4,000K + PL-LF LED 12.5W/1,600lm/4,000K	76.0	4.830.9009.20F-RD

**accessory:**  
 bolt-on root – hot dip galvanised steel, incl. screws  
**G300/1000-C** 14.0 9.900.0022.15

class II – at extra cost (add "S" at the end)

Technical specifications are subject to change without notice. 03.2026

