

post top luminaire


**FIETE I DA LED**

recom. pole height:	3.00m – 6.00m
light standards:	low to high lighting requirements
lamp:	incl. 2 DA+ (2x4) LED modules, easy to replace
colour temperature:	3.000K warm white or 4.000K neutral white
surge protection:	10kV
LED gear:	electronic driver, up to 100.000 hours, driver with integrated Constant Light Output (CLO) in order to keep luminous flux at the same over the entire life time; AC/DC compatible for operation with central battery systems
LED life expectancy:	65,000 hours/ L100/ B10; 100,000 hours/ L90 /B10 for minimum maintenance costs due to an excellent thermal management
light control:	at extra cost: power reduction, dimming, DALI
optical system:	directed light (multi layer) provided by an computer optimised anti-aging lens technology; dark sky
light distribution:	street optics , square optics , area optics , cycle path optics – see next page (other optics on request)
luminaire head:	made of stainless steel and corrosion-resistant cast aluminium; canopy ø 570mm; powder coated
colour:	DB 703; other RAL or DB colour without extra cost on request
glazing:	PMMA RESIST, clear, high-impact resistant
wiring:	completely wired; incl. cable
installation:	for top entry ø 76mm
accessory:	pole, cable junction box, pole accessories, back light shield for no glare on the rear side – to be ordered separately
application areas:	residential and local distributor roads, schools, home for elderly people, hotels, factory premises, parkways, squares, car parks, shopping center, pedestrian zones

Bestückung	kg	Bestellnummer
DA+ (2x4) LED 13W/2.200lm/3.000K ⁽²⁾	22,5	9.016.8207.017xxx-3
DA+ (2x4) LED 15W/2.500lm/3.000K ⁽²⁾	22,5	9.016.8210.017xxx-3
DA+ (2x4) LED 20W/3.200lm/3.000K ⁽²⁾	22,5	9.016.8212.017xxx-3
DA+ (2x4) LED 26W/4.000lm/3.000K ⁽²⁾	22,5	9.016.8227.017xxx-3
DA+ (2x4) LED 12W/2.300lm/4.000K ⁽²⁾	22,5	9.016.8207.017xxx
DA+ (2x4) LED 14W/2.600lm/4.000K ⁽²⁾	22,5	9.016.8210.017xxx
DA+ (2x4) LED 19W/3.300lm/4.000K ⁽²⁾	22,5	9.016.8212.017xxx
DA+ (2x4) LED 25W/4.100lm/4.000K ⁽²⁾	22,5	9.016.8227.017xxx
power reduction without pilot-line, dimming level and time according to customer's request		9.016.xxxx.017xxx(-3)-93
power reduction with pilot-line, dimming level and logic according to customer's request		9.016.xxxx.017xxx(-3)-94
accessory: back light shield LS DA 1		2.914.8301.17


⁽²⁾ 2 modules
class II – at extra cost (add "S" at the end)

Technical specifications are subject to change without notice. 08.2026

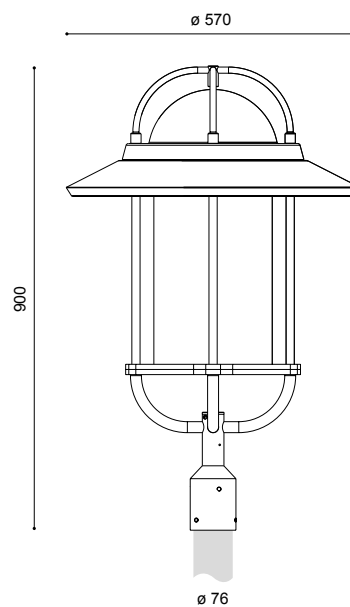


street optics (2x4)


asymmetrical wide beam / asymmetrical deep wide beam



X.XXX.XXXX.XX028




X.XXX.XXXX.XX088



X.XXX.XXXX.XX098

area optics (2x4)


asymmetrical deep wide beam



X.XXX.XXXX.XX138

square optics (2x4)


symmetrical



X.XXX.XXXX.XX058

cycle path optics (2x4)

narrow and wide beam



X.XXX.XXXX.XX268