



luminous column

# FINNLEY L II PL-LF LED

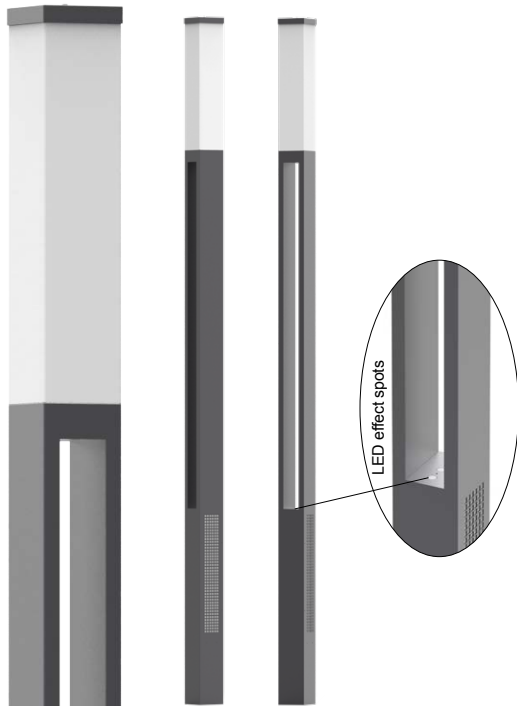

total height: 4.00m  
 light standards: low and medium lighting requirements  
 lamp: incl. PL-LF LED module; 1 BLED luminous plates; 6 LED effect spots  
 colour temperature: 4,000K neutral white or 3,000K warm white  
 LED gear: electronic drivers, up to 50,000 hours  
 LED life expectancy: up to 50,000 hours/ L70 for minimum maintenance costs due to an excellent thermal management  
 optical system: diffuse  
 light distribution: PL-LF LED: symmetrical, 4 windows; BLED: asymmetrical, homogeneous light; effect spots in order to illuminate the hollow  
 luminaire head: frameless cuboid with cap of stainless steel; powder coated  
 luminaire body: made of a square stainless steel profile with access door for cable junction box and for LED change; incl. square stainless steel cap; powder coated or brushed and passivated  
 colour: DB 703; other RAL or DB colour without extra cost on request  
 glazing: PMMA RESIST, opal, high-impact resistant, rimless completely wired; incl. cable until access door  
 wiring: completely wired; incl. cable until access door  
 installation: with flange plate to be screwed on a concrete foundation on site or on an additional bolt-on root or with root to be set into the ground  
 accessory: bolt-on root with screws – to be ordered separately  
 application areas: promenades; boulevards, schools, home for elderly people, hotels, factory premises, squares, parks, pedestrian zones, car parks

lamp	kg	product code
<b>powder coated</b>		
with root		
PL-LF LED 19W/2.400lm/4.000K + 2 x LED 0,8W + 1 x BLED 7W/600lm	96,0	4.108.9186.01E
PL-LF LED 21W/2.520lm/3.000K + 2 x LED 0,8W + 1 x BLED 7W/600lm	96,0	4.108.9186.01-3E
with flange plate		
PL-LF LED 19W/2.400lm/4.000K + 2 x LED 0,8W + 1 x BLED 7W/600lm	96,0	4.108.9186.01F
PL-LF LED 21W/2.520lm/3.000K + 2 x LED 0,8W + 1 x BLED 7W/600lm	96,0	4.108.9186.01-3F
<b>brushed and passivated</b>	4.108.9186.311(-3)x	
<b>accessory:</b>		
bolt-on root - hot dip galvanised steel, incl. screws <b>Q300/1000</b>	25.8	9.900.0035.00

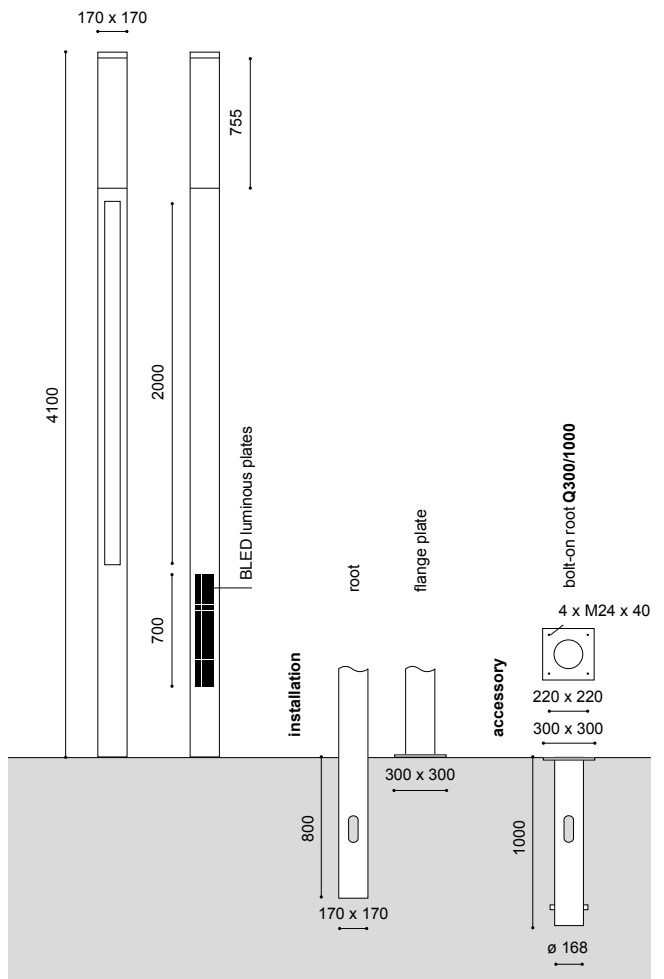

class II – at extra cost (add "S" at the end)

Technical specifications are subject to change without notice. 10.2024