


bollard

FRANZI P I DA LED

CE | Ⓢ | Ⓜ | EN 60598-2-3 | IP 65 | IK 08 | 220V – 240V / 50Hz – 60Hz



- total height: 1.00m
- light standards: for low lighting requirements
- lamp: incl. 2x DA+ (2x2) module; easy to replace
- colour temperature: 3,000K warm white or 4,000K neutral white
- LED gear: electronic driver; up to 100.000; driver with Constant Light Output (CLO) in order to keep the luminous flux at the same level over the entire life time
- LED life expectancy: 65,000 hours/ L100/ B10; 100,000 hours/ L90 /B10 for minimum maintenance costs due to an excellent thermal management
- light control: at extra cost: dimming
- optical system: directed light (multi layer) provided by an exchangeable, anti-aging lens technology
- light distribution: narrow and wide beam (268); symmetrical (058) or deep wide beam (.098)
- luminaire body: vandalism-resistant luminaire body with welded bracket, made of rectangular aluminium profile, with 2 access doors for cable junction box and driver; powder coated
- colour: DB 703; other RAL or DB colour without extra cost on request
- glazing: PMMA RESIST, clear, high-impact resistant
- wiring: cable junction box for max. 2 Kabel 3 x 2,5mm² up to 3 x 4,0mm²
- installation: with flange plate to be screwed on a concrete foundation on site or on an additional bolt-on root or with root to be set into the ground
- accessory: bolt-on root with screws – to be ordered separately
- application areas: parkways, private areas, small squares, boulevards, schools, home for elderly people, hotels, factory premises, parks, pedestrian zones

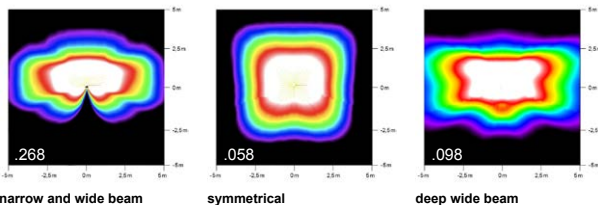

lamp	kg	product code
------	----	--------------

narrow and wide beam with root

DA+ 2x2 LED 6,5W/1.100lm/3.000K ⁽²⁾	11,2	9.020.8203.01268-3-E
DA+ 2x2 LED 7,5W/1.250lm/3.000K ⁽²⁾	11,2	9.020.8204.01268-3-E
DA+ 2x2 LED 10W/1.600lm/3.000K ⁽²⁾	11,2	9.020.8205.01268-3-E
DA+ 2x2 LED 13W/2.000lm/3.000K ⁽²⁾	11,2	9.020.8206.01268-3-E

DA+ 2x2 LED 6,5W/1.150lm/4.000K ⁽²⁾	11,2	9.020.8203.01268-E
DA+ 2x2 LED 7,5W/1.300lm/4.000K ⁽²⁾	11,2	9.020.8204.01268-E
DA+ 2x2 LED 9,5W/1.650lm/4.000K ⁽²⁾	11,2	9.020.8205.01268-E
DA+ 2x2 LED 12,5W/2.050lm/4.000K ⁽²⁾	11,2	9.020.8206.01268-E

with flange plate 9.020.xxxx.01xxx(-3)-F

symmetrical 9.020.xxxx.01**058**(-3)-x

deep wide beam 9.020.xxxx.01**098**(-3)-x

accessory:

bolt on root – hot dip galvanised steel, incl. screws
Q250/500 7,5 9.900.0016.00

⁽²⁾ 2 modules
 class II at extra cost (add "S" at the end)

Technical specifications are subject to change without notice. 05.2024

