



# light cube

## HANNA L I, II, III LED

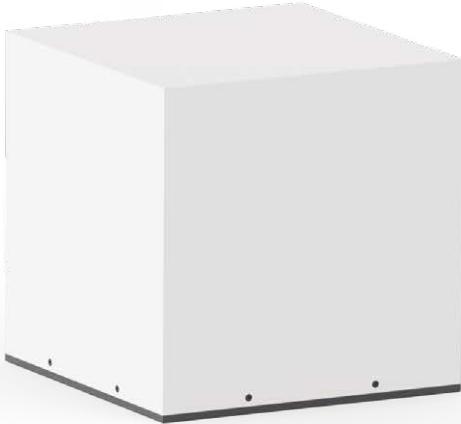

foil colour: traffic orange

- total height: 470mm / 610mm / 790mm
- light standards: low lighting requirements
- lamp: incl. BA-RGBW or DA LED
- colour temperature: 4.000K neutral white; with film according to customer's request
- LED gear: electronic driver, up to 85,000 hours/ B10; driver with integrated Constant Light Output (CLO) in order to keep the luminous flux at the same level over the entire life time
- LED life expectancy: up to 50,000 hours/ L100/ B10 or minimum maintenance costs due to an excellent thermal management
- light control: at extra cost: dimming; DALI light control for RGBW
- optical system: diffuse, symmetrical
- light distribution: 5 windows
- luminaire body: base made of hot-dip galvanised steel, powder coated
- colour: DB 703; other RAL or DB colour without extra cost on request
- glazing: PMMA RESIST, opal, high-impact, resistant, robust, 10mm thick, wrapped in a translucent, colourfast, weather- and UV resistant special film for outdoor use, available in 12 different colours; on request: custom made film according to the individual needs
- wiring: completely wired
- installation: with integrated flange plate to be screwed on a concrete foundation on site
- accessories: DALI light control "ECO" or "PRO" in order to manage the light regarding dimlevel and colour – to be ordered separately
- application areas: boulevards, schools, homes for elderly people, hotels, factory premises, squares, parks, pedestrian zones, car parks

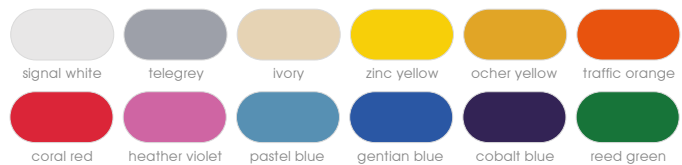

lamp	kg	product code
<b>HANNA L I LED</b>		
BA-RGBW	34,0	9.997.8008.40
DA LED 23W/4.200lm/4.000K/film	34,0	9.997.8215.40-93
<b>HANNA L II LED</b>		
BA-RGBW	56,0	9.997.8008.41
DA LED 35W/6.000lm/4.000K/film	56,0	9.997.8224.41-93
<b>HANNA L III LED</b>		
BA-RGBW	79,0	9.997.8008.42
DA LED 46W/8.400lm/4.000K/film	79,0	9.997.8415.42-93

accessory	
DALI light control via app on mobile devices	
DALI light control "ECO"	2.919.0100.12-2*
DALI light control "PRO"	2.913.4005.42**

\* for up to 8 light cubes HANNA and max. 300m distance  
 \*\* for up to 66 light cubes HANNA and max. 300m distance class II – at extra cost (add "S" at the end)

Technical specifications are subject to change without notice. 02.2024

