

bench with light

# KORA B IX DAWU LED 2.1




- dimensions: 1845 mm x 760 mm x 1007 mm
- seat height: 470 mm
- shape: ergonomically curved; many narrow wooden slats; square bench legs with backrest
- rest: with backrest
- finish: metal parts made of stainless steel V2A (304) and cast aluminium, powder coated
- lamp: incl. 1 x DAWU LED module (2x4) per foot
- colour temperature: 3,000K warm white, other colour temperature on request
- LED gear: electronic drivers ON/OFF; the power can be switched on the driver via DIP-switch provided by the customer (6 levels)
- LED life expectancy: 65,000 hours/ L100/ B10; 100,000 hours/ L90 / B10 for minimal maintenance costs due to excellent thermal management
- glazing: PMMA RESIST, satined, high-impact resistant
- Anschluss: incl. connection terminal in both feet
- colour: metal parts in DB 703; other RAL or DB colour on request
- slats: 28 pieces made of solid hardwood (Kambala), untreated, each 30 mm x 46 mm
- installation: with flange plate or with flange plate to pave on it to be screwed on a concrete foundation on site or on an additional sub-construction
- accessories: sub-construction made of hot-dip galvanised steel with flange plates – to be ordered separately
- application areas: promenades, parks, boulevards, schools, homes for elderly people, terraces, hotels, factory premises, paths, squares, pedestrian zones, churches, cemeteries

product	kg	product code
<b>KORA B IX DA LED, stainless steel, powder coated</b>		
with flange plate	120.0	9.997.0010.90
with flange plate for paving	125.0	9.997.0010.90F

- 6 adjustable power levels:**
- 3.5W/ 600lm/ 150mA      4.5W/ 800lm/ 200mA
  - 5.5W/ 975lm/ 250mA      6.5W/ 1,150lm/ 300mA\*
  - 7.5W/ 1,350lm/ 350mA      9.0W/ 1,500lm/ 400mA
- \* factory setting:  
DAWU 2x4 LED 6.5W/ 1,150lm/ 3,000K

**accessory:**

sub-construction - hot-dip galvanized steel		
<b>UQ300/1200</b>	27.0	7.100.1000.00

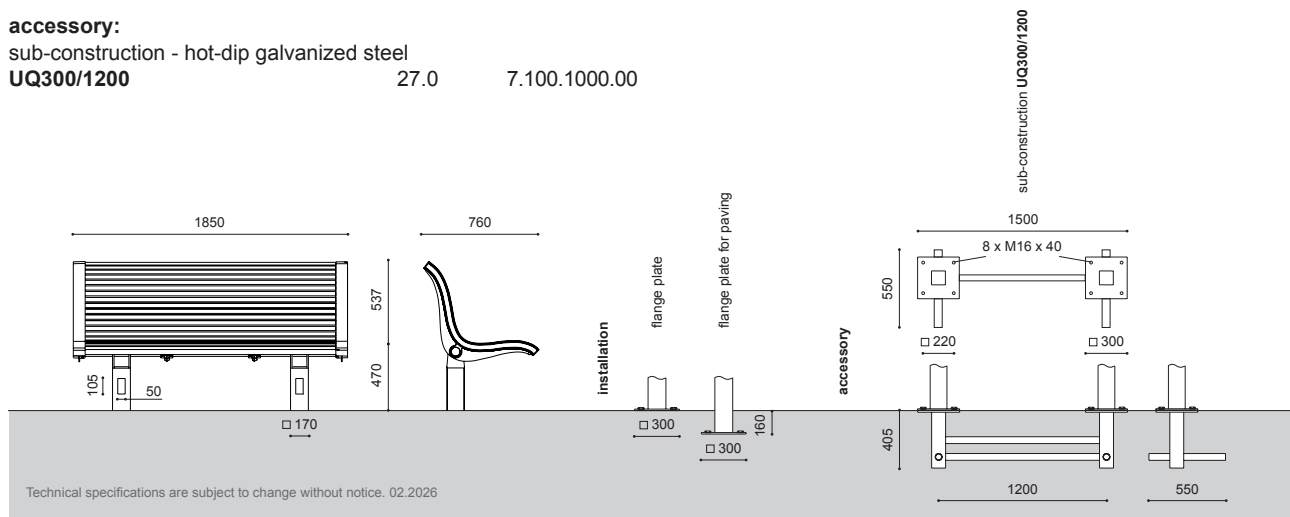

Technical specifications are subject to change without notice. 02.2026