

luminous column


LIA L I/15 LIN LED

CE | Ⓢ | EN 60598-2-3 | IP 65 | IK 08 | 220V – 240V / 50Hz – 60Hz



total height: 4.50m (other heights on request)
 light standards: for low and medium lighting requirements
 lamp: incl. 1 LIN LED module
 colour temperature: 3,000K warm white or 4,000K neutral white
 LED gear: electronic driver, up to 100,000 hours
 LED life expectancy: up to 80,000 hours
 optical system: diffuse
 light distribution: symmetrical
 luminaire head: cap with decorative element made of aluminium; powder coated
 luminaire body: tube made of aluminium with access door for cable junction box; powder coated
 colour: RAL or DB
 glazing: PMMA RESIST, opal, high-impact
 wiring: ready wired; incl. cable until access door
 installation: tube with flange plate to be screwed on a concrete foundation on site or on an additional bolt-on root or with root to be set into the ground
 accessories: pole accessories, bolt-on root, foundation, accessory ring or cable junction box – to be ordered separately
 application areas: promenades, parkways, boulevards, schools, home for elderly people, hotels, factory premises, residential and local distributor roads, paths, cycle lanes, squares, car parks, pedestrian zones

lamp	kg	product code
with root		
LIN LED 28W/5.000lm/3.000K	65,0	8.628.8152.31-1CE
LIN LED 37W/6.000lm/3.000K	65,0	8.628.8153.31-1CE
LIN LED 26W/5.000lm/4.000K	65,0	8.628.8152.41-1CE
LIN LED 35W/6.000lm/4.000K	65,0	8.628.8153.41-1CE
with flange plate		8.628.xxxx.x1-1CF
accessory:		
bolt-on root – hot dip galvanised steel, incl. screws		
G300/1000	14,0	9.900.0022.02
accessory ring – stainless steel, powder coated		
Z305/2	0,8	9.900.0008.73

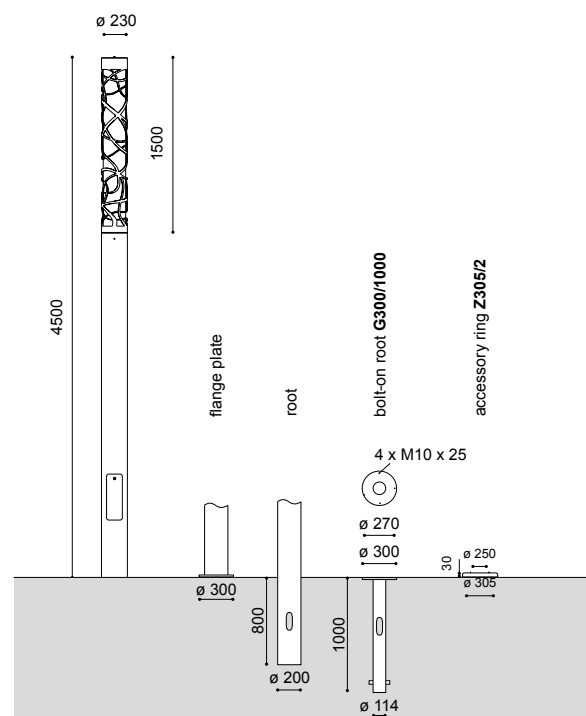

class II – at extra cost (add "S" at the end)

Technical specifications are subject to change without notice. 02.2024