


bollard

LOTTA P III TAB-LL LED

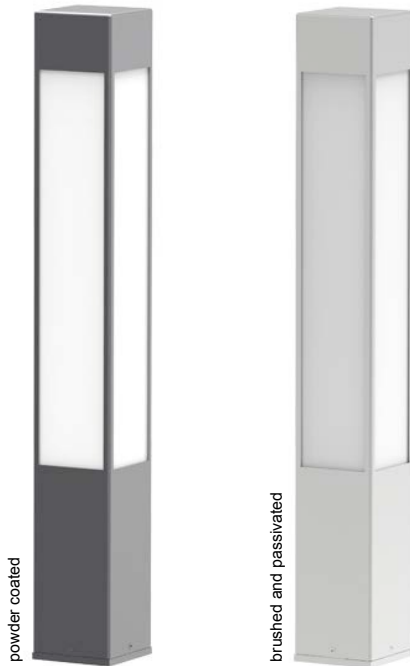

total height: 0.9m (other heights on request)
 light standards: low lighting requirements
 lamp: incl. TAB-LL LED module
 colour temperature: 3,000K warm white or 4,000K neutral white
 LED gear: incl. 2 DIM LED driver
 LED life expectancy: 50,000 hours/ L70/ B10 for minimum maintenance costs due to an excellent thermal management
 optical system: diffuse
 light distribution: 4 windows
 luminaire body: detachable; made of a square stainless steel profile, without access door; powder coated or brushed and passivated
 colour: RAL or DB
 glazing: PMMA RESIST, opal, high-impact resistant
 wiring: completely wired; incl. cable until the integrated cable junction box for max. 2 cables up to 5x10mm² / 3 cables up to 5x6mm²
 installation: with integrated flange plate to be screwed on a concrete foundation on site or on an additional bolt-on root
 accessory: cable, bolt-on root with screws – to be ordered separately
 application areas: elegant bollard for hotels, factory premises, schools, home for elderly people, private gardens, squares, parks, pedestrian zones

lamp	kg	product code
powder coated		
TAB-LL3 LED 14.9W/1,532lm/3,000K	10.0	6.810.9123.04-G30
TAB-LL3 LED 14.9W/1,632lm/4,000K	10.0	6.810.9123.04-G40
brushed and passivated		
TAB-LL3 LED 14.9W/1,532lm/3,000K	10.0	6.810.9123.34-G30
TAB-LL3 LED 14.9W/1,632lm/4,000K	10.0	6.810.9123.34-G40
accessory:		
bolt-on root – hot dip galvanised steel, incl. screws		
Q120/400	2.8	9.900.0014.00

class II – at extra cost (add "S" at the end)

Technical specifications are subject to change without notice. 08.2018

