


spot luminaire with bell-shaped heads

MAJA | LSL LED



total height: 3.30m / 4.50m
 light standards: for medium and high lighting requirements
 lamp: incl. 1 LSL LED module per spot
 colour temperature: 3,000K warm white or 4,000K neutral white on request
 surge protection: 10kV
 LED gear: incl. 4DIM driver, up to 100,000 hours; driver with integrated Constant Light Output (CLO) in order to keep the luminous flux at the same level over the entire life time; suitable for emergency systems (driver AC/ DC compatible)
 LED life expectancy: 50,000 hours/ L100/ B10 for minimum maintenance costs due to an excellent thermal management
 optical system: directed light provided by reflector technology
 light distribution: symmetrical
 beam: 25° (19°, 38°, 58° on request)
 luminaire head: 1x or 3x spots, adjustable; made of aluminum, with decorative bracket made of stainless steel, powder coated
 pole: tubular conical column, made of hot-dip galvanised steel, with door for cable junction box; powder coated
 colour: DB 703; other RAL or DB colour without extra cost on request
 glazing: PMMA RESIST, clear, high-impact
 wiring: completely wired; incl. cable until access door
 installation: with flange plate to be screwed on a concrete foundation on site or on an additional bolt-on root; on request: with root to be set into the ground
 accessory: cable junction box, pole accessory – to be ordered separately
 application areas: squares, boulevards, playgrounds, schools, home for elderly people, hotels, resorts, factory premises, car parks

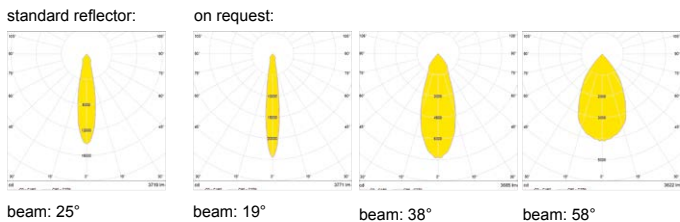

beam: 25° beam: 19° beam: 38° beam: 58°

lamp **kg** **product code**

beam: 25°		
1 luminaire head - 3,30m		
LSL LED 33W/5.460lm/4.000K	26,8	6.200.8098.011
LSL LED 33W/5.100lm/3.000K	26,8	6.200.8098.011-3
3 luminaire heads - 4,50m		
each LSL LED 33W/5.460lm/4.000K	74,4	6.200.8098.031
each LSL LED 33W/5.100lm/3.000K	74,4	6.200.8098.031-3
beam: 19°		6.200.xxxx.0x0(-3)
beam: 38°		6.200.xxxx.0x2(-3)
beam: 58°		6.200.xxxx.0x3(-3)

power reduction without pilot-line, dimming level and time according to customer's request 6.200.xxxx.0x1(-3)-93

power reduction with pilot-line, dimming level and logic according to customer's request 6.200.xxxx.0x1(-3)-94

accessory:
 bolt-on root – hot dip galvanised steel, incl. screws
G240/1000 11,5 9.900.0012.10L

class II at extra cost (add "S" at the end)
 Technical specifications are subject to change without notice. 10.2025

