


post top luminaire

MIA VIII/1 LSL LED



recom. pole height: 3.00m – 6.00m
 light standards: low and medium lighting requirements
 lamp: incl. LSL LED module
 colour temperature: 3.000K warm white or 4.000K neutral white
 LED gear: electronic driver, up to 100.000 hours; driver with integrated Constant Light Output (CLO) in order to keep the luminous flux at the same level over the entire life time
 LED life expectancy: up to 100.000 hours, 50.000 hours/ L100/ B10 for minimum maintenance costs due to an excellent thermal management
 light control: at extra cost: power reduction or dimming
 optical system: directed light provided by reflector technology in conjunction with reflection by an integrated aluminium cone
 light distribution: indirect, symmetrical
 luminaire head: incl. ø 655mm canopy made of aluminium with a special white, reflective underside finish and base made of corrosionresistant cast aluminium
 colour: DB 703; other RAL or DB colour without extra cost on request
 glazing: PMMA RESIST, clear, high-impact resistant
 wiring: completely wired; via a plug and socket connector
 installation: for post top ø 76mm
 accessory: pole, cable, cable junction box, pole accessories – to be ordered separately
 application areas: residential and local distribution roads, car parks, schools, hotels, factory premises, paths, squares, parks

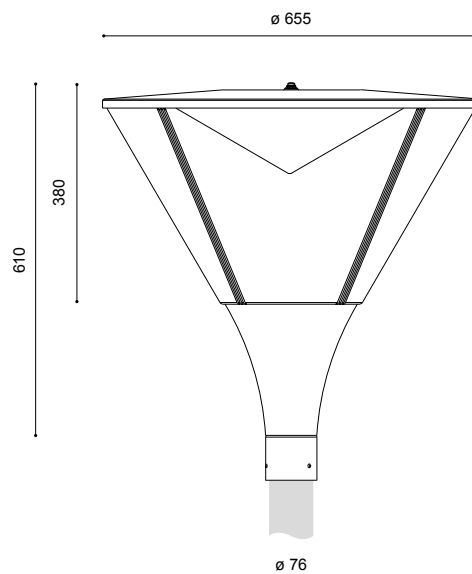

lamp	kg	product code
LSL LED 33W/5,100lm/3,000K	20,0	6.128.9098.722-3
LSL LED 33W/5,460lm/4,000K	20,0	6.128.9098.722
power reduction without pilot-line, dimming level and time according to customer's request		6.128.xxxx.722(-3)-93
power reduction with pilot-line, dimming level and logic according to customer's request		6.128.xxxx.722(-3)-94

class II – at extra cost (add "S" at the end)

Technical specifications are subject to change without notice. 02.2022