



CE

EN 60598-2-3



CLO

AC / DC

10kV

RA 80 CRI 80

IP 65

IK 08

220 – 240V / 50 – 60Hz


WA: 1,8m: 0,34m<sup>2</sup>  
2,46m: 0,42m<sup>2</sup> / 2,70m: 0,46m<sup>2</sup>

WA: 3,34m: 0,56m<sup>2</sup>  
4,00m: 0,68m<sup>2</sup> / 4,24m: 0,72m<sup>2</sup>

DB 703

DYNAMISCHE STELE FÜR HORIZONTALE BELEUCHTUNGSAUFGABEN. DYNAMIC COLUMN FOR HORIZONTAL ILLUMINANCE TASKS.

Hauptanwendungen:  
application areas:

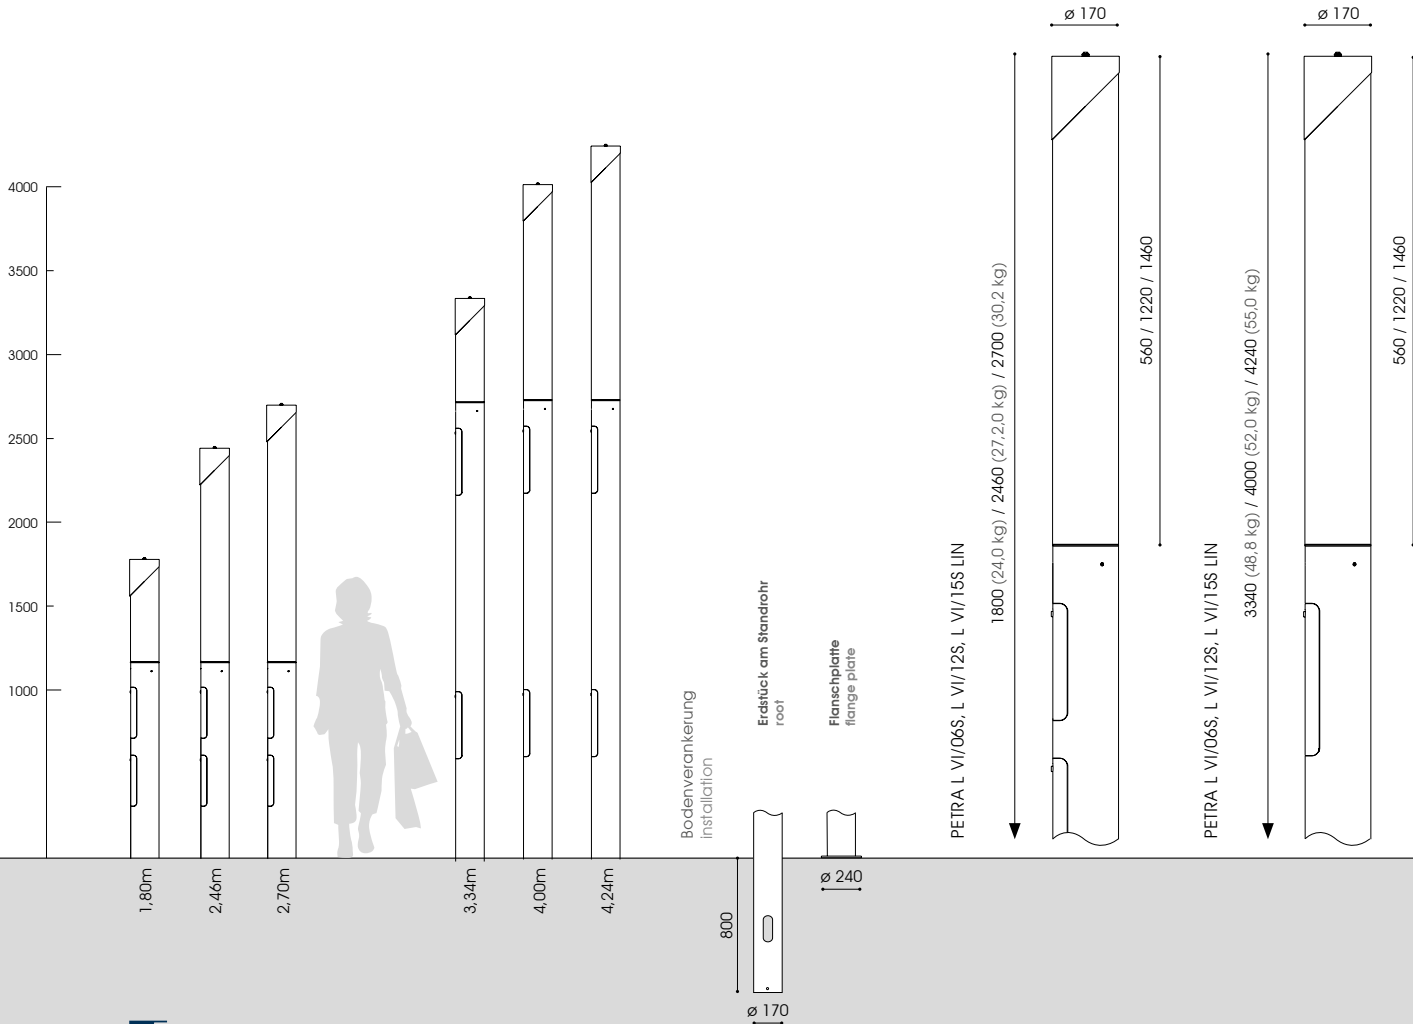

# PETRA L VI/06S, VI/12S, VI/15S



LICHTSTEILE  
LUMINOUS COLUMN

## LIN LED

Varianten für Farbtemperatur: 2.700K / 3.000K / 4.000K  
variants for colour temperature: 2,700K / 3,000K / 4,000K

Lichtverteilung: symmetrisch  
light distribution: symmetrical

Bereich Lichtstrom: 2.500lm - 6.000lm  
lumen range: 2,500lm - 6,000lm

optisches System: vertikales LED Modul für optimale horizontale Beleuchtungsstärken  
optical system: vertically mounted LED module for optimal horizontal illuminance levels

- Leuchtenkopf mit schräger Kappe aus Aluminium; Gussaufnahme; Standrohr aus feuerverzinktem Stahl mit Tür für Kabelübergangskasten; pulverbeschichtet
- Abdeckung aus PMMA RESIST, opal, schlagzäh
- komplett verdrahtet; mit freien Leitungsenden bis zur unteren Tür
- mit Flanschplatte zum Aufschrauben auf bauseitigem Betonfundament oder auf zusätzlichem Eingrabstück oder mit Erdstück am Standrohr zum Einsetzen in das Erdreich
- separat zu bestellen: Kabel, Kabelübergangskasten, Eingrabstück (G240/800) mit Schrauben, Zierring (Z248/1), Vogelabweiser
- luminaire head with oblique cap made of aluminium; base made of cast aluminium; straight tubular column made of hot-dip galvanised steel with access door for cable junction box; powder coated
- glazing made of PMMA RESIST, opal, high-impact resistant
- completely wired; incl. cable until lower access door
- with flange plate to be screwed on a concrete foundation on site or on an additional bolt-on root or with root to be set into the ground
- to be ordered separately: cable, cable junction box, pole accessories, bolt-on root (G240/800) with screws, accessory ring (Z248/1), bird deflector

PETRA L VI/06S LIN - 1,80m	
mit Erdstück with root	
LIN LED 16W/2.500lm/3.000K	9.824.8063.213-18E
LIN LED 15W/2.500lm/4.000K	9.824.8063.214-18E

PETRA L VI/12S LIN - 2,46m	
mit Erdstück with root	
LIN LED 31W/5.000lm/3.000K	9.824.8123.213-25E
LIN LED 29W/5.000lm/4.000K	9.824.8123.214-25E

PETRA L VI/15S LIN - 2,70m	
mit Erdstück with root	
LIN LED 37W/6.000lm/3.000K	9.824.8153.213-27E
LIN LED 35W/6.000lm/4.000K	9.824.8153.214-27E

mit Flanschplatte with flange plate 9.824.xxxx.21x-xxF

PETRA L VI/06S LIN - 3,34m	
mit Erdstück with root	
LIN LED 16W/2.500lm/3.000K	9.824.8063.213-34E
LIN LED 15W/2.500lm/4.000K	9.824.8063.214-34E

PETRA L VI/12S LIN - 4,00m	
mit Erdstück with root	
LIN LED 31W/5.000lm/3.000K	9.824.8123.213BE
LIN LED 29W/5.000lm/4.000K	9.824.8123.214BE

PETRA L VI/15S LIN - 4,24m	
mit Erdstück with root	
LIN LED 37W/6.000lm/3.000K	9.824.8153.213-42E
LIN LED 35W/6.000lm/4.000K	9.824.8153.214-42E

mit Flanschplatte with flange plate 9.824.xxxx.21x-xxF

