

mini feeder pillar for power

PETRA ME IV




- dimensions: 0.36m/ ø 170mm/ door: 270mm
- shape: round tube
- finish: - hot-dip galvanised steel, powder coated in RAL or DB colour
- stainless steel V2A (304), brushed and passivated
- door: - lift off (removable)
- with cable slot
- with tri-head bolt lock M6, incl. tri-head bolt key M6
- equipment: - isolated socket inside, IP 44
- CEE socket inside, IP 44
- mounting board
- use: - operates with closed access door, while using only socket
- installation: with welded flange plate; to be screwed
- accessories: cable, bolt-on root (G240/500) with screws, accessory ring (Z248/1) – to be ordered separately
- application areas: small, solid bollard for e.g. hotels, churches, cemeteries, hospitals, home for elderly, factory premises, parks, marinas, camping sites, private areas

equipment	kg	product code
2 pcs. sockets 16A / 1p / 250V		
made of hot-dip galvanised steel, powder coated	8,0	9.883.0001.102S
made of stainless steel, brushed and passivated	8,0	9.883.0001.302S

accessory:
bolt-on root – hot-dip galvanised steel, incl. screws
G240/500 7,1 9.900.0012.00
accessory ring – stainless steel, powder coated
Z248/1 0,4 9.900.0008.70
accessory ring – stainless steel, brushed and passivated
Z248/1 0,4 9.900.0008.45

Technical specifications are subject to change without notice. 04.2016

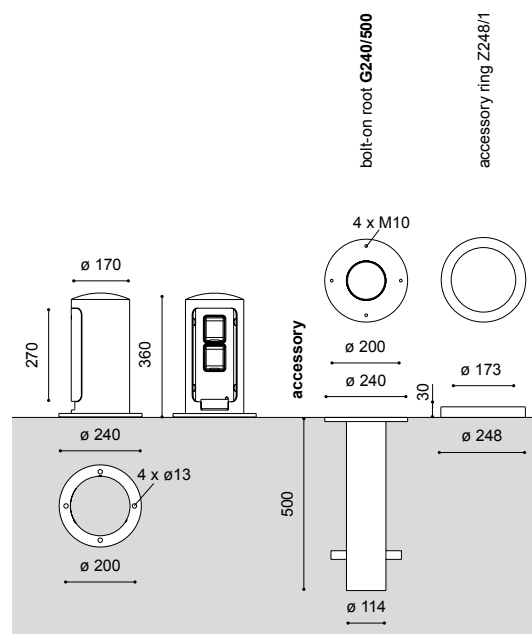

Heiterblickstr. 37 · D-04347 Leipzig · tel.: +49 341 245613-0 · info@leipziger-leuchten.com · www.leipziger-leuchten.com

Caution!

While using the plugs and sockets out in the open air a residual current protective device (main isolator) is required according to VDE 0100. The delivered feeder pillars are normally equipped with a main isolator. In that case please take care that the protective device of the main matches with the isolator of the feeder pillar.