

post top luminaire


CE | Ⓢ | Ⓜ | EN 60598-2-3 | IP 65 | IK 08 | RA 70 | 220V – 240V / 50Hz – 60Hz

RETRO III LLM-DA LED



- recom. pole height: 3.50m – 6.00m
- light standards: for low and medium lighting requirements
- lamp: incl. 1 glare-free LLM-DA LED module, easy to replace
- colour temperature: 3.000K warm white or 4.000K neutral white
- surge protection: 10kV
- LED gear: incl. driver, up to 100,000 hours; with integrated Constant Light Output (CLO) in order to keep the luminous flux at the same level over the entire life time; AC/DC compatible for emergency
- LED life expectancy: 65,000 hours/ L100/ B10; 100,000 hours/ L90 /B10 for minimum maintenance costs due to an excellent thermal management
- light control: at extra cost: power reduction, dimming, DALI or CLEVER LIGHT
- optical system: reflector system for horizontally mounted LLM-DA LED modules
- light distribution: wide beam
- luminaire head: made of aluminium with a special white, reflective underside finish; powder coated
- bracket: incl. decorative circular bracket, made of stainless steel, powder coated
- glazing: polycarbonate, clear or pearl structured, high impact resistant, UV-stabilised
- colour: DB 703; other RAL or DB colour without extra cost on request
- wiring: completely wired, incl. cable, 2.00m; via a plug and socket connector below the bracket
- installation: for top entry \varnothing 60mm or \varnothing 76mm
- accessory: cable, pole, pole accessories - to be ordered separately
- application areas: promenades, parkways, boulevards, schools, home for elderly people, hotels, factory premises, residential and local distributor roads, paths, cycle lanes, small squares, car parks, pedestrian zones

lamp	kg	product code
\varnothing 60mm, clear glazing		
LLM-DA LED 9W/1,100lm/3,000K	11.7	4.773.9017.05-2
LLM-DA LED 16W/1,800lm/3,000K	11.7	4.773.9008.05-2
LLM-DA LED 26W/3,000lm/3,000K	11.7	4.773.9042.05-2
\varnothing 60mm, pearl structured glazing		
LLM-DA LED 8W/1,100lm/4,000K	11.7	4.773.9015.05-2
LLM-DA LED 15W/1,800lm/4,000K	11.7	4.773.9005.05-2
LLM-DA LED 24W/3,000lm/4,000K	11.7	4.773.9035.05-2
\varnothing 76mm, clear glazing		
		4.773.xxxx.06-2
\varnothing 76mm, pearl structured glazing		
		4.773.xxxx.07-2
		4.773.xxxx.08-2
power reduction without pilot-line, dimming level and time according to customer's request		4.773.xxxx.0x-2-93
power reduction with pilot-line, dimming level and logic according to customer's request		4.773.xxxx.0x-2-94

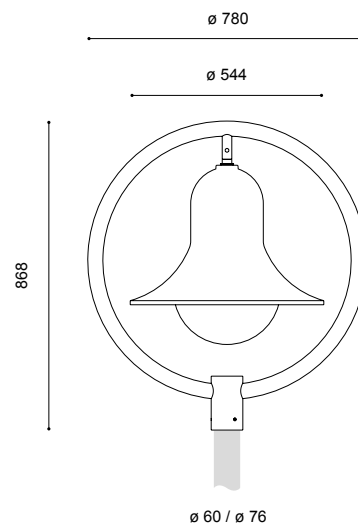

class II at extra cost (add "S" at the end)

Technical specifications are subject to change without notice. 09.2022