


luminaire head
TILLA X/1



recom. pole height: 4.00m – 7.00m
 luminaire head: incl. cap and base made of aluminium; powder coated
 colour: DB 703; other RAL or DB colour without extra cost on request
 glazing: PMMA RESIST, clear, high-impact resistant
 wiring: completely wired; via a plug and socket connector below the luminaire head
 installation: for post top \varnothing 76mm
 accessory: cable, column, pole accessories – to be ordered separately
 application areas: schools, hotels, factory premises, paths, squares, parks, car parks, shopping center

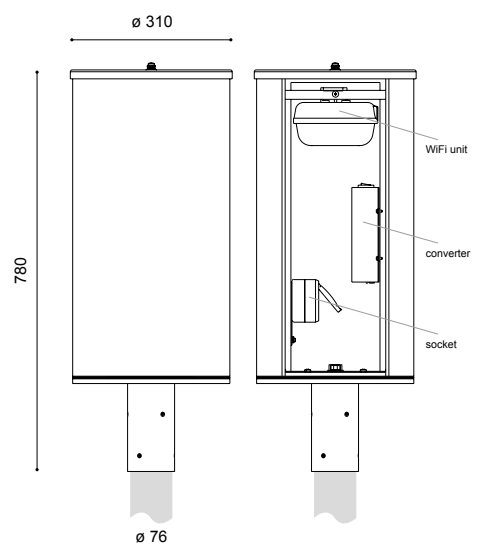

equipment	kg	product code
-----------	----	--------------

incl. WLAN components provided by the customer:

1x WiFi antenna

1x converter

incl. sockets 230V/16A without MCB/RCCB

13,7 9.502.0102.LK

class II at extra cost (add "S" at the end)

Technical specifications are subject to change without notice. 11.2022