CE | ⏚ | EN 60598-2-3 | IP 65 | 220V – 240V / 50Hz – 60Hz

Zhaga

wall luminaire

WL NORA VIII DA LED

mounting height:	2.50m – 5.00m
light standards:	for low and medium lighting requirements
lamp:	incl. 1 glare-free LLM-DA LED module; easy to replace
colour temperature:	3,000K warm white or 4,000K neutral white
surge protection:	10kV
LED gear:	incl. driver, up to 100,000 hours; with integrated Constant Light Output (CLO) in order to keep the luminous flux at the same level over the entire life time; AC/DC compatible for emergency
LED life expectancy:	65,000 hours/ L100/ B10; 100,000 hours/ L90 /B10 for minimum maintenance costs due to an excellent thermal management
light control:	at extra cost: power reduction, dimming, DALI or CLEVER LIGHT
optical system:	computer-optimised reflector made of highest grade aluminium, polished and anodised for horizontally mounted LLM-DA LED module
light distribution:	wide beam
luminaire head:	made of aluminium with a special white, reflective underside finish; powder coated
bracket:	incl. decorative semicircular bracket made of stainless steel, with wall shield made of hot dip galvanised steel; powder coated
glazing:	polycarbonate, clear or pearled, impact resistant, UV-stabilised
colour:	DB 703; other RAL or DB colour without extra cost on request
wiring:	luminaire head completely wired; via a clamp within the wall shield
installation:	to be screwed on the wall
accessory:	fixing material for the wall installation – to be ordered separately
application areas:	schools, hotels, home for elderly people, factory premises, small car parks, paths, parks

lamp	kg	product code
clear glazing		
LLM-DA LED 9W/1.100lm/3.000K	13,2	9.748.9017.05-2
LLM-DA LED 16W/1.800lm/3.000K	13,2	9.748.9008.05-2
LLM-DA LED 26W/3.000lm/3.000K	13,2	9.748.9042.05-2
LLM-DA LED 8W/1.100lm/4.000K	13,2	9.748.9015.05-2
LLM-DA LED 15W/1.800lm/4.000K	13,2	9.748.9005.05-2
LLM-DA LED 24W/3.000lm/4.000K	13,2	9.748.9035.05-2
pearled glazing		9.748.xxxx.0**6**-2
power reduction without pilot-line, dimming level and time according to customer's request		9.748.xxxx.0x-2-**93**
power reduction with pilot-line, dimming level and logic according to customer's request		9.748.xxxx.0x-2-**94**

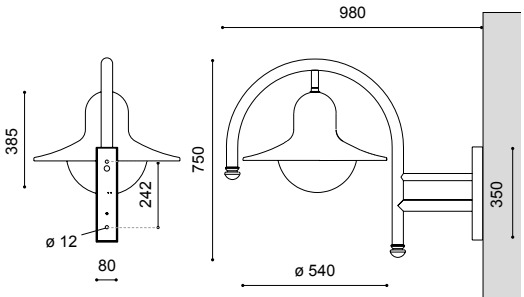

class II – at extra cost (add "S" at the end)

Technical specifications are subject to change without notice. 11.2025