

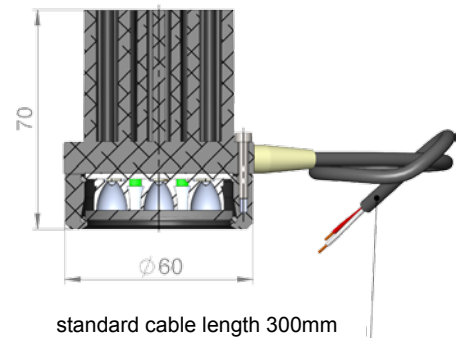


# LED Spot 30° FRIEDER X/3

CE | DIN VDE 0711 | IP 65 | 220V – 240V / 50Hz – 60Hz



light standards:	for low lighting requirements
lamp:	incl. 1x 623lm/8W system power consumption resp. 1x 910lm/8W system power consumption
colour temperature:	2.700K warm white or 4.000K neutral white
LED gear:	incl. electronic driver, not dimmable
LED life expectancy:	50.000 hours/ L70 for minimum maintenance costs due to an excellent thermal management at extra cost: dimming
light control:	directed light (multi layer) provided by lens optic
optical system:	narrow beam, 30°
light distribution:	housing and frame made of corrosion resistant cast aluminium
spot:	PMMA, RESIST, high-impact, structured
glazing:	black, anodised
colour:	with cable and driver
wiring:	with magnetic ball joint; for fixation inside or outside luminaires; to be screwed on
installation:	for the illumination of trees, facades, sculptures, logos
application areas:	

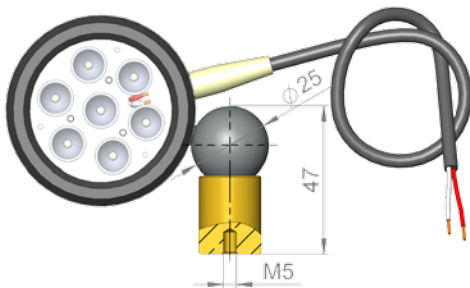

lamp	kg	product code
LED 7W/623lm/2.700K/30°	1,0	6.119.9011.10-3S
LED 7W/910lm/4.000K/30°	1,0	6.119.9007.10-3S

Technical specifications are subject to change without notice. 12.2013