


bollard

PETRA PA I/350 LED

PETRA PA III/350 LED

CE | Ⓢ | □ | EN 60598-2-3 | IP 65 | 220V – 240V / 50Hz – 60Hz

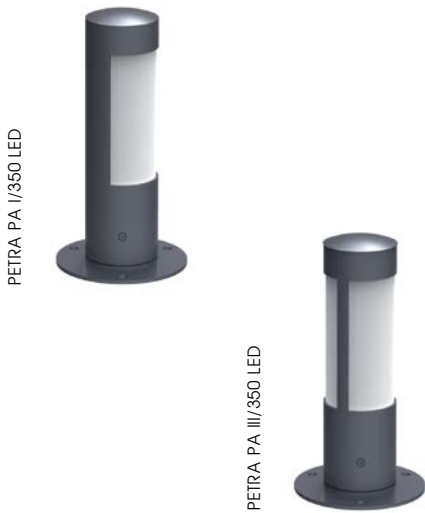

- total height: 0.35m
- light standards: for low lighting requirements
- lamp: incl. LED module
- colour temperature: 2.700K warm white
- gear: ballast integrated in lamp
- LED life expectancy: up to 25.000 hours/ L70
- light control: at extra cost: dimming
- optical system: vertically mounted light source; diffuse
- light distribution: PETRA PA I/350: asymmetrical, 1 window
PETRA PA III/350: symmetrical, 2 windows
- luminaire body: made of aluminium; powder coated
- colour: RAL or DB
- glazing: PMMA RESIST, opal, high-impact resistant
- wiring: via a plug and socket connector within the luminaire head
- installation: tube with flange plate to be screwed on a concrete foundation on site or on an additional bolt-on root; delivery in one piece; lamp separately packed
- accessories: cable, bolt-on root incl. screws and accessory ring – to be ordered separately
- application areas: parkways, schools, hotels, factory premises, paths, squares, beer gardens, camping-sites

lamp	socket	kg	product code
PETRA PA I/350 asymmetrical, 1 window LED 8W/806lm/2.700K	E27	2,3	9.883.9002.00135AL
PETRA PA III/350 symmetrical, 2 windows LED 8W/806lm/2.700K	E27	2,0	9.883.9002.00335AL
accessory: bolt-on root G180 incl. screws		3,3	9.900.0011.00
accessory ring Z180, powder coated		0,2	9.900.0010.25

class II – at extra cost (add "S" at the end)

Technical specifications are subject to change without notice. 05.2017

